


RECOMMENDED PCB LAYOUT FOR 6 PINS
PCB TOLERANCE ± 0.05

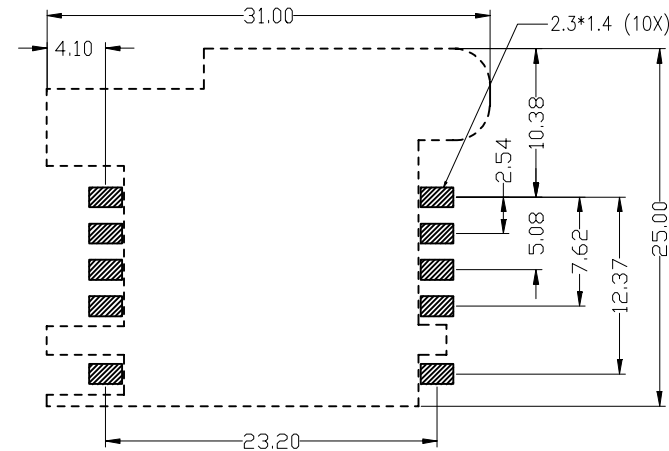

RECOMMENDED PCB LAYOUT FOR 8 PINS
PCB TOLERANCE ± 0.05

*PART NO. W/O R WILL
COME IN TUBE PACKAGE

SPECIFICATIONS:

MATERIAL:-

HOUSING: THERMOPLASTIC, UL 94V-0

CONTACT: PHOSPHOR BRONZE

FINISH:-

CONTACT AREA: SELECTIVE GOLD (15u") PLATING

ELECTRICAL:-

CONTACT RESISTANCE: 100 m Ω MAX.INSULATION RESISTANCE: 1000 M Ω /500V DC

NOTES: ALL DIMENSIONS AND NOTES

MARKED * ARE CRITICAL AND

MUST BE CHECKED IN ACCORDANCE

WITH QUALITY DOC. Q1-02A

Allan	4	20.09.09	A229
Allan	3	05.11.07	A089
Allan	2	17.11.06	A006
Allan	1	08.08.06	-

NAME	ISS.	DATE	C/NOTE
------	------	------	--------

APPROVED:

CHECKED:

DRAWN: Allan

CUSTOMER REF.:

ASSEMBLY DRG:

ORDER CODE

M508-320 XX 45R

06: 6 PINS

08: 8 PINS

HARWIN

HARWIN USA
TEL: 603 893 5376
FAX: 603 893 5396
mis@harwin.com

HARWIN Europe (UK)
TEL: 023 9231 4545
FAX: 023 9231 4590
mis@harwin.co.uk

HARWIN Asia
TEL: +65 6 779 4909
FAX: +65 6 779 3868
mis@harwin.com.sg

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ± 1 mm
X.X = ± 0.3 mm
X.XX = ± 0.2 mm
X.XXX = ± 0.1 mm

ANGLES = $\pm 3^\circ$

UNLESS STATED

MATERIAL:

SEE NOTES

FINISH: SEE NOTES

S/AREA: mm²

TITLE:

SIM CARD CONN. PUSH-IN/OUT
SMT TYPE

DRAWING NUMBER:

M508-320 XX 45R

SHT
1
OF
1