


HARWIN

Datamate Trio-Tek

M80 Series Female Open Barrel crimp contact and associated Rectangular Crimp Housings

November 2011

Section	Title	Page
1	Description of Connectors and Intended Application	2
2	Marking of Connector and/or Package	2 - 4
3	Ratings	4 - 5
Appendix A	Contact Orientation	6
Appendix B	Instructions for the use of connectors fitted with Jackscrews	6
Appendix C	Instructions for separating Trio-Tek L-Tek connectors	7
Appendix D	Instructions for contact extraction from crimp mouldings	7

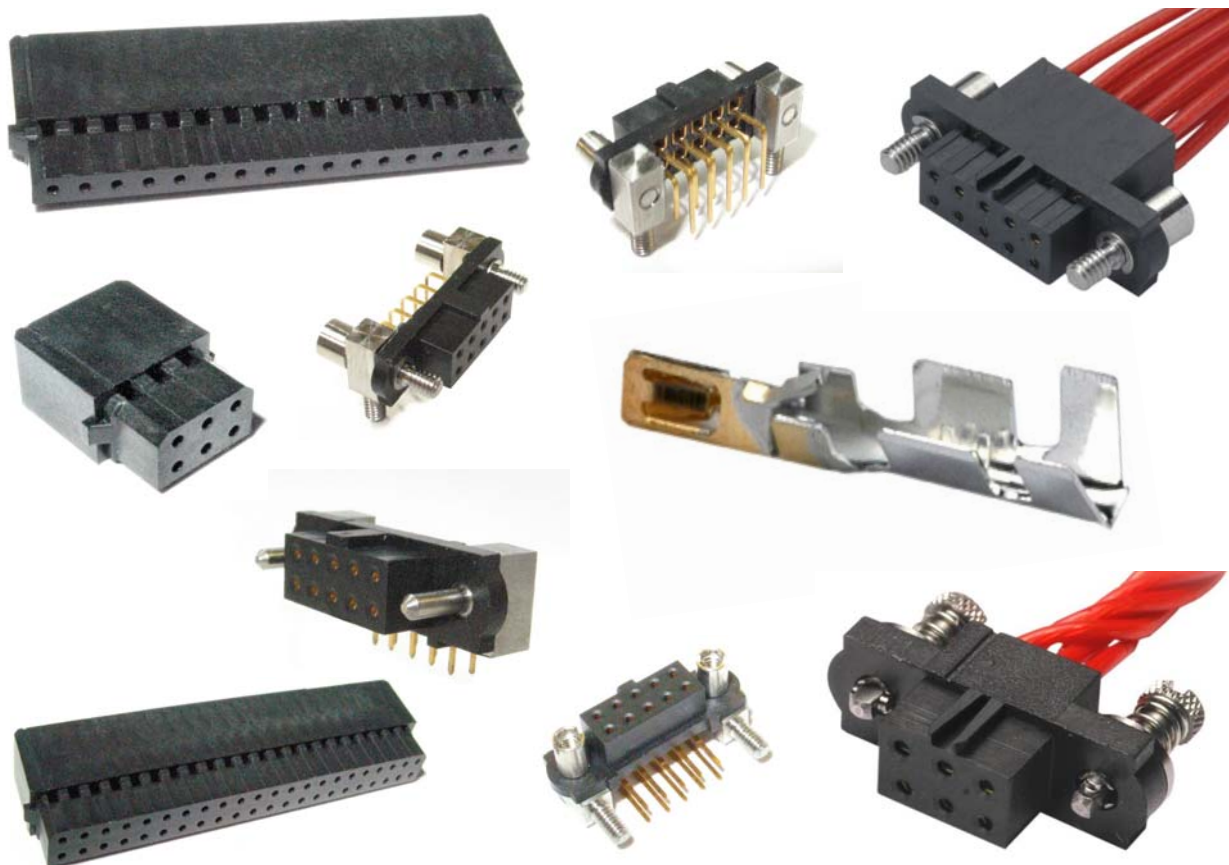

COMPONENT SPECIFICATION

**1.0 DESCRIPTION OF CONNECTOR AND INTENDED APPLICATION.**

The M80 series stamped female Trio-Tek open barrel crimp contact and rectangular Trio-Tek crimp housing form part of the Datamate J-Tek and L-Tek ranges of 2mm pitch male and female connectors. These fully shrouded, unsealed connectors with replaceable contacts are designed for interconnecting cable-to-cable & cable-to-board.

Datamate Trio-Tek contacts are gold or gold/tin plated. The contact zone of a gold plated contact is hard acid gold of 98% purity.

The J-Tek range covers 4 to 50 ways, suitable for various cable-to-cable & cable-to-board applications.


The L-Tek range covers common sizes in DIL and SIL housing styles, suitable for various cable-to-cable & cable-to-board applications.

Both J-Tek and L-Tek female crimp connectors utilising the Trio-Tek contacts are fully intermateable with the males in these ranges.

These connectors are intended for use as low voltage connectors in high packing density electronic equipment. Connector housings are polarised to prevent mis-matching and can be produced with jackscrews, with or without board mounting. Datamate Trio-Tek reeled contacts permit fully automated crimping in medium and high volume applications, whereas loose contacts can be used for low volume applications using appropriate hand crimp tooling.

2.0 MARKING OF CONNECTOR AND/OR PACKAGE**2.1 MARKING OF THE FEMALE CRIMP CONTACT AND/OR PACKAGE (ORDER CODE).**


The marking (order code) shall appear on the package and shall be of the following style:

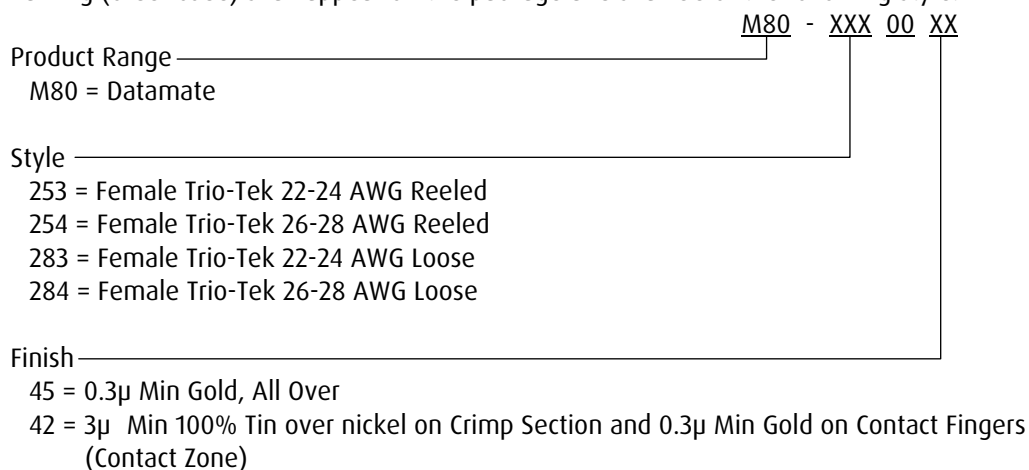


COMPONENT SPECIFICATION

**2.2 MARKING OF THE J-TEK FEMALE CRIMP HOUSINGS AND/OR PACKAGE (ORDER CODE).**

The marking (order code) shall appear on the package and shall be of the following style:

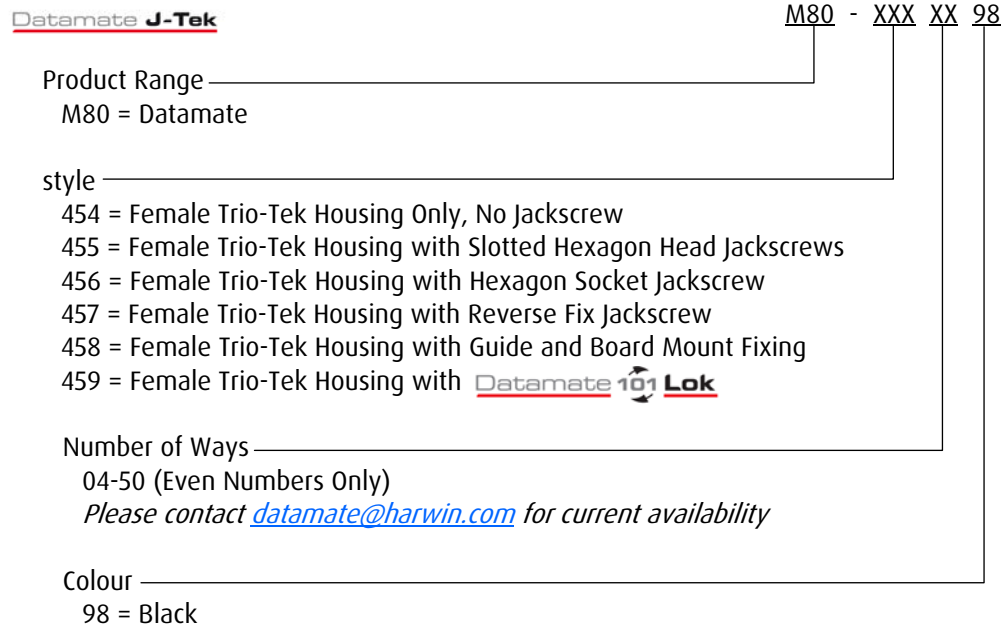**2.3 MARKING OF THE L-TEK FEMALE CRIMP HOUSINGS AND/OR PACKAGE (ORDER CODE).**

The marking (order code) shall appear on the package and shall be of the following style:

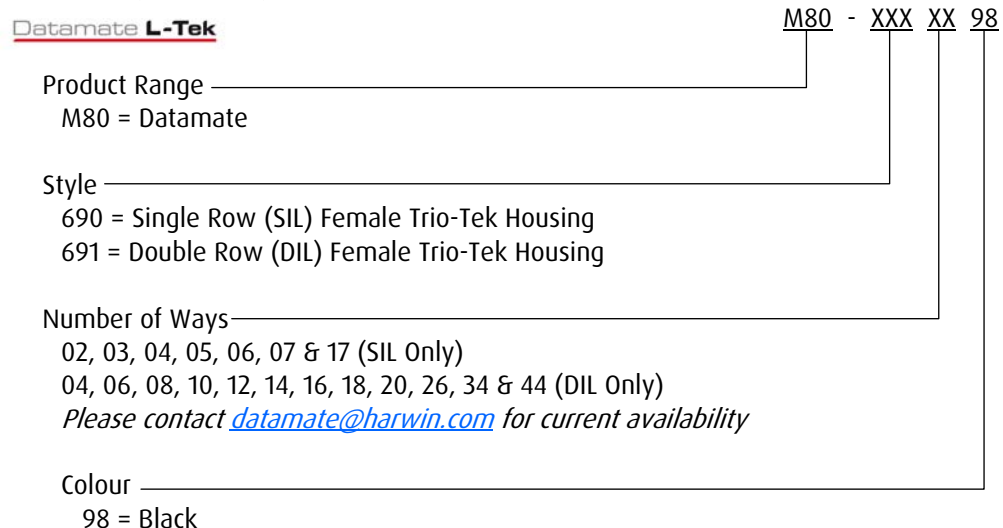

COMPONENT SPECIFICATION

HARWIN

Datamate Trio-Tek

2.4 MARKING OF J-TEK FEMALE HORIZONTAL CONNECTORS AND/OR PACKAGE (ORDER CODE).

The marking (order code) shall appear on the package and shall be of the following style:

<p><u>Datamate J-Tek</u></p> <p>Product Range _____ M80 = Datamate</p> <p>style _____ 435 = Horizontal Female Trio-Tek 3.0mm PC-tail with reverse fix and board mount 436 = Horizontal Female Trio-Tek 4.5mm PC-tail with reverse fix and board mount 440 = Horizontal Female Trio-Tek 3.0mm PC-tail with hex socket and board mount 441 = Horizontal Female Trio-Tek 4.5mm PC-tail with hex socket and board mount 445 = Horizontal Female Trio-Tek 3.0mm PC-tail with guide pin and board mount 446 = Horizontal Female Trio-Tek 3.0mm PC-tail with guide pin and board mount</p> <p>Number of Ways _____ 06, 08, 10, 12, 14, 20, 26, 34 <i>Please contact datamate@harwin.com for current availability</i></p> <p>Finish _____ 05 = 0.3μ Min Gold, All Over 22 = 3.0μ Min Tin/Lead on PC-Tail and 0.3μMin Gold on Contact Fingers (Contact Zone) 42 = 3.0μ Min 100% Tin over nickel on PC-Tail and 0.3μMin Gold on Contact Fingers (Contact Zone)</p>	<p>M80 - XXX XX XX</p>
--	------------------------

3.0 RATINGS.

All materials are listed on individual drawings.

3.1 ELECTRICAL CHARACTERISTICS

Current - per individual contact at an ambient temperature of 25°C	3.3A max
(When only one contact per connector is electrically loaded)	
Current - per individual contact at an ambient temperature of 85°C	2.6A max
(When only one contact per connector is electrically loaded)	
Current - per contact through all contacts at an ambient temperature of 25°C	3.0A max
Current - per contact through all contacts at an ambient temperature of 85°C	2.2A max
Working Voltage (at 3.3A max, 1013mbar, sea level).....	120V DC or AC peak
Working Voltage (at 2.0A max, 1013mbar, sea level)	240V DC or AC peak
Voltage Proof (at 1013mbar, sea level).....	360V DC or AC peak
Contact Resistance (initial).....	20m Ω max
Contact Resistance (after conditioning).....	25m Ω max
Insulation Resistance (initial)	1,000M Ω min
Insulation Resistance (hot after conditioning).....	100M Ω min
Creepage Distance (contact-to-contact)	0.35mm min
Clearance Distance (contact-to-contact).....	0.35mm min

COMPONENT SPECIFICATION

HARWIN**Datamate Trio-Tek****3.2 ENVIRONMENTAL CHARACTERISTICS**

Environmental Classification	55/125/56 at 95% RH
Low Air Pressure Severity	300 mbar
Vibration Severity * at 98m/s ² (10g) duration 6 hours	10Hz to 2000Hz over 0.75mm
Bump Severity *	390m/s ² (40g) 4000 ±10 bumps
Shock Severity *	981m/s ² (100g) for 6ms
Acceleration Severity *	490m/s ² (50g)

*Jackscrew fixings fully utilized

3.3 MECHANICAL CHARACTERISTICS

Durability	400 operations
High Temperature, Long Term (current as in 3.1)	1000 hours at 85°C
High Temperature, Short Term (no electrical load)	250 hours at 125°C
Contact Retention in Housing (crimp products only)	10N min
Contact Replacement in Housing (crimp products only)	5 times
Contact Holding Force	0.2N min
Insertion Force (per contact, using mating contact)	2.8N max, 0.5N min
Withdrawal Force (per contact, using mating contact)	1.8N max, 0.2N min

3.4 MATERIALS

Contact, Trio-Tek	Beryllium Copper
Housing	Glass Filled Thermoplastic
Housing Flame Retardant rating	UL 94 V-0
Jackscrew Hardware	Stainless Steel

3.5 WIRE TERMINATION RANGE - TRIO-TEK CRIMP PRODUCTS ONLY

Wire Type (recommended)	BS 3G 210 Type A
Maximum Insulation Diameter	Ø1.1mm
Insulation Strip Length	2.7-3.0mm

Size	Conductor				Maximum Insulation Diameter	Hand Crimp Tool Z80-255 Nest I/D	Conductor Barrel		Minimum Pull-Off Force
	Stranding	Diameter	Area	Circular MIL Area			Crimp Height	Crimp Width	
AWG	No. x Ømm	Ømm	mm ²	CMA	Ømm	No.	mm	mm	N
28	7 x 0.12	0.36	0.0792	156	0.71	26-28	0.50—0.56	1.02	9.8
26	7 x 0.15	0.45	0.1237	244	0.80				18
24	7 x 0.20	0.60	0.2199	434	0.95	22-24	0.76—0.82	1.21	29
22	19 x 0.15	0.75	0.3358	663	1.10				45


Appendix A & B

HARWIN

Datamate Trio-Tek

APPENDIX A - Contact Orientations

These diagrams show examples of contact numbering with reference to the polarisation feature. They represent female connectors, without jackscrews.

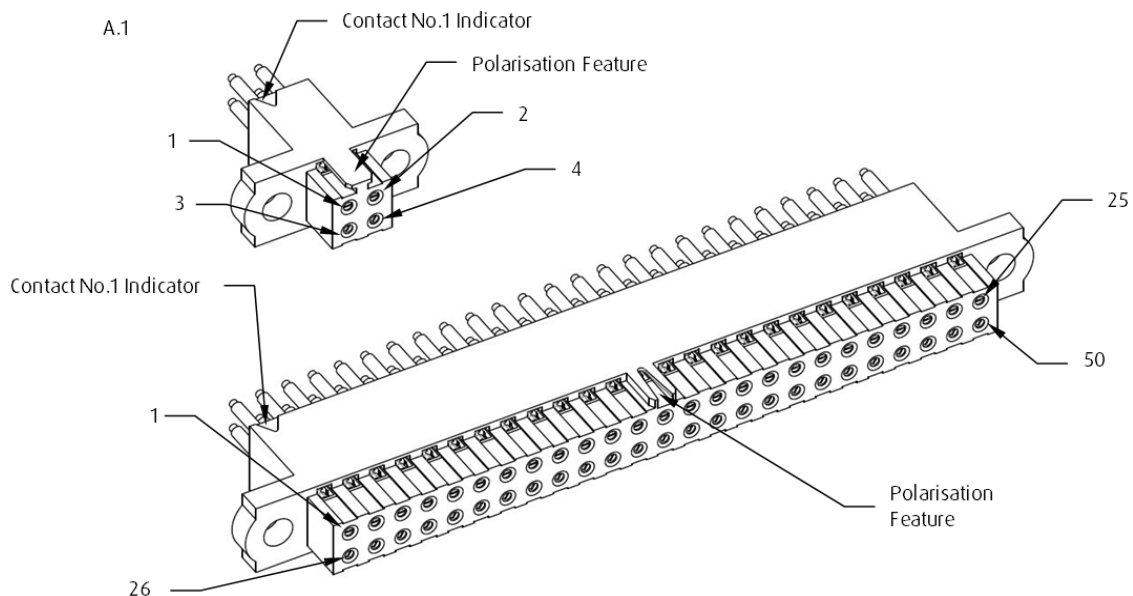

APPENDIX B - Instructions For The Use of J-Tek Housings Fitted With Jackscrews

Connectors are fitted with jackscrews where it is considered necessary to provide mechanical assistance in ensuring a satisfactory engagement and separation of the connector. This may apply in cases where engagement and separation forces are so high as to prevent satisfactory hand engagement, or where access to the connector is restricted. Jackscrews also provide a locking feature, preventing the connector from disengaging under adverse conditions.

In order to obtain maximum effectiveness from the jackscrew system, the following rules for their use should be observed:

1. The connector with the fixed jackscrew should be fixed to the mounting board by means of the male thread on the jackscrew, and the supplied M2 nut. The nut should be tightened to a torque of $21 \pm \text{cmN}$.
2. On engaging the two halves of the connector after ensuring correct polarity, lightly push home the floating half until the jackscrews touch. Then, maintaining the pressure, turn one of the floating jackscrews clockwise, until it engages with the fixed screw. Repeat with the other screw.

Then screw in each jackscrew, ensuring even loading by applying a maximum of one turn to each screw in sequence until the connector is bottomed. This will be evident by a sudden increase in the torque required on the screw. This torque should not exceed 23Ncm .

NB: Care should be taken when aligning male and female threads, to avoid cross-threading and possible failure of parts.

3. On disengaging the two halves of the connector turn each of the floating jackscrews anti-clockwise. Again ensure even loading by turning each screw in sequence for a maximum of one turn until the jackscrews disengage. The connector can then be easily pulled apart.

HARWIN

Datamate Trio-Tek

APPENDIX C - Instructions For Separating L-tek Housings from Latched Males

The recommended separator tool for this product is Z80-299. Consult Tooling Instruction Sheet IS-30 for full details on tools use. IS-30 is available from <http://www.harwin.com/downloads/instructions/> (select Z80-299 Datamate Separator Tool).



APPENDIX D - Contact Extraction from Housing Instructions

Z80-258 tool is required to remove contacts from housings (J-Tek or L-Tek style) . Consult Tooling Instruction Sheet IS-28 for full details on tools use. IS-28 is available from <http://www.harwin.com/downloads/instructions/> (select Z80-258 Extraction Tool).

