


COMPARISON - SHIELDING



Specifications are subject to change.

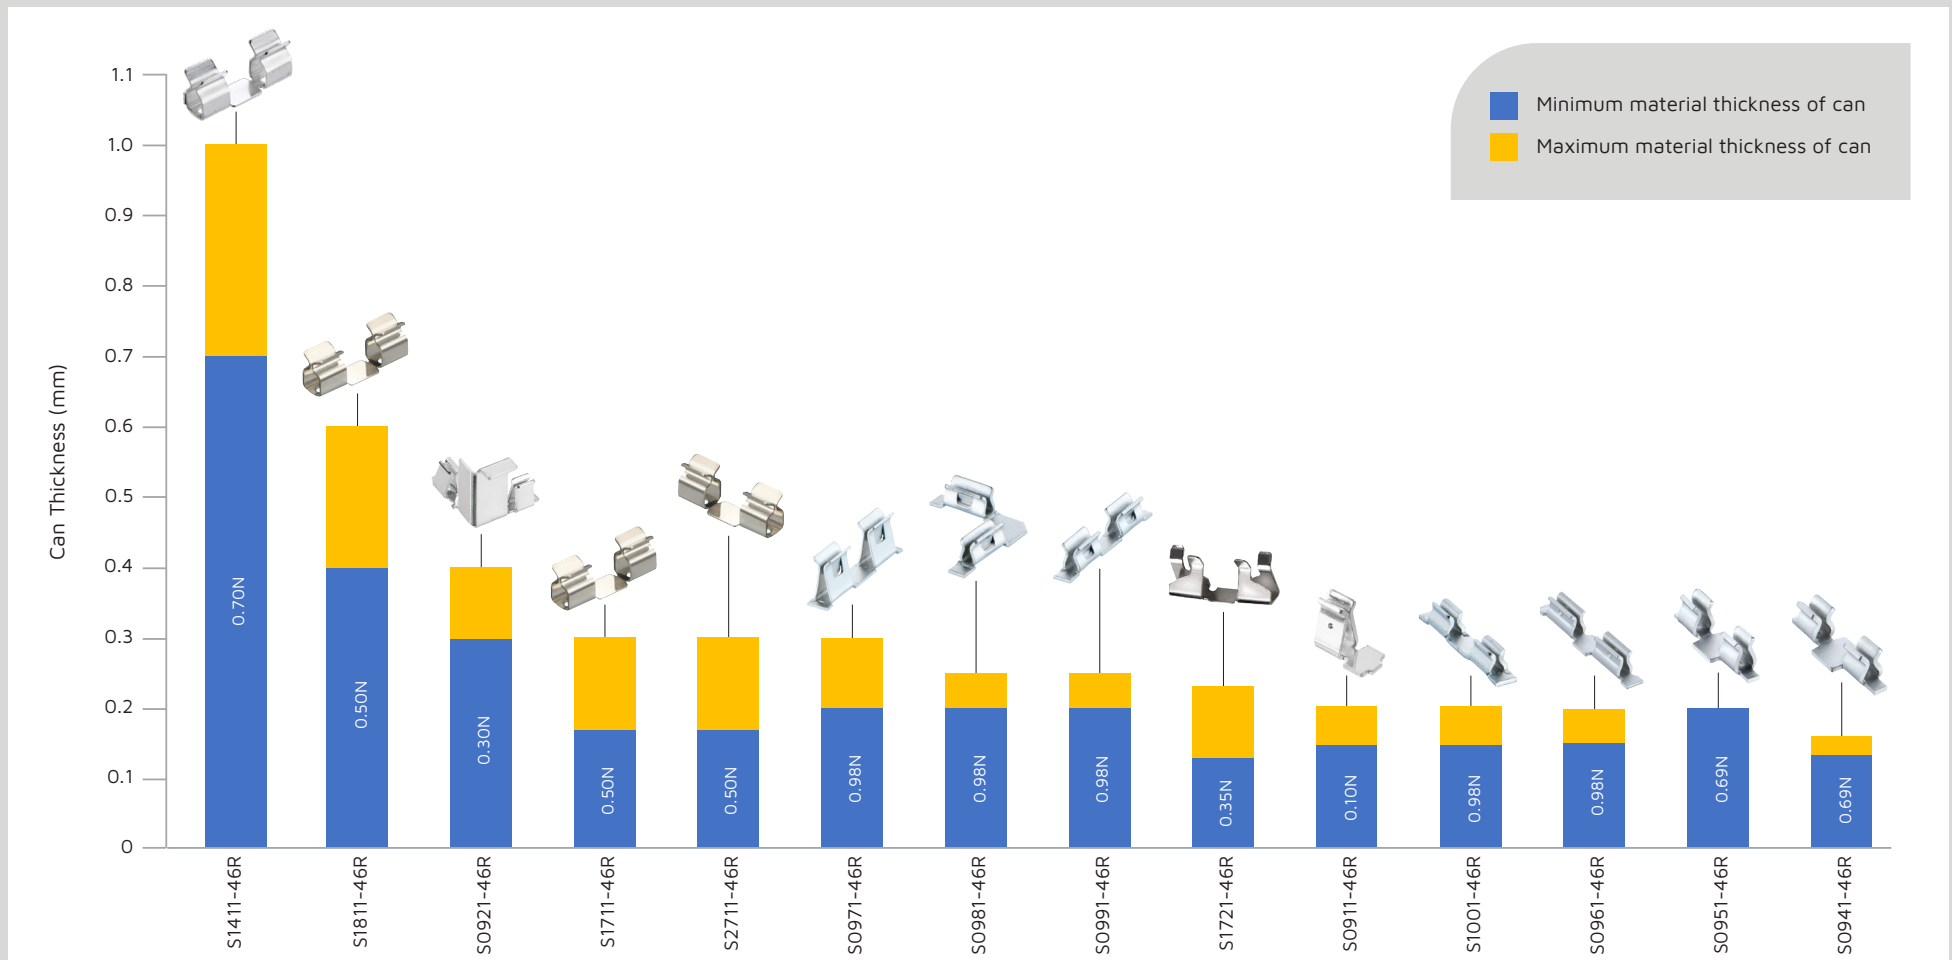

COMPARISON - SHIELDING

| PART NUMBER | LENGTH (MM) | WIDTH (MM) | HEIGHT (MM) | SUITABLE FOR CAN MATERIAL THICKNESS | BASE MATERIAL | INSERTION FORCE: MAX (N) | WITHDRAWAL FORCE: MIN (N) | FINISH | STYLE |
|-------------|-------------|------------|-------------|-------------------------------------|------------------|---|--|--------|-------------------|
| S1411-46R | 8.79 | 2.28 | 3.65 | 0.70-1.0mm | Beryllium Copper | 0.70mm Shield = 4.5 1.00mm Shield = 7 | 0.70mm Shield = 0.8 1.00mm Shield = 1.5 | Tin | Maxi |
| S1811-46R | 8.80 | 2.48 | 3.37 | 0.40-0.60mm | Beryllium Copper | 0.40mm Shield = 1.5 - 8 0.60mm Shield = 8 - 28 | 0.5 | Tin | Midi |
| S0921-46R | 5.65 | 5.65 | 5.45 | 0.30-0.40mm | Cupro-Nickel | 15 | 0.3 | Tin | Corner with Guard |
| S1711-46R | 8.79 | 2.28 | 3.55 | 0.17-0.30mm | Beryllium Copper | 4 | 0.5 | Tin | Midi |
| S2711-46R | 8.79 | 2.28 | 3.55 | 0.17-0.30mm | Cupro-Nickel | 4 | 0.5 | Tin | Midi |
| S0971-46R | 5.8 | 1 | 2 | 0.20-0.30mm | Stainless Steel | 19.6 | 0.98 | Tin | Mini |
| S0981-46R | 4.7 | 4.7 | 1.3 | 0.20-0.25mm | Stainless Steel | 19.6 | 0.98 | Tin | Corner |
| S0991-46R | 6.5 | 1 | 1.3 | 0.20-0.25mm | Stainless Steel | 19.6 | 0.98 | Tin | Micro |
| S1721-46R | 5.2 | 1.07 | 2.23 | 0.13-0.23mm | Beryllium Copper | 5 | 0.35 | Tin | Mini |
| S0911-46R | 2.3 | 1.2 | 2 | 0.15-0.20mm | Beryllium Copper | 3 | 0.1 | Tin | Micro |
| S1001-46R | 4.5 | 0.7 | 0.8 | 0.15-0.20mm | Stainless Steel | 19.7 | 0.98 | Tin | Micro |
| S0961-46R | 6.5 | 1 | 1.28 | 0.15-0.20mm | Stainless Steel | 24.5 | 0.98 | Tin | Micro |
| S0951-46R | 3.9 | 1.1 | 1.28 | 0.20mm | Stainless Steel | 9.8 | 0.69 | Tin | Micro |
| S0941-46R | 3.9 | 1.1 | 1 | 0.135-0.16mm | Stainless Steel | 9.8 | 0.69 | Tin | Micro |

Dimensions given are nominal - check Technical Drawing for tolerances and additional specifications.